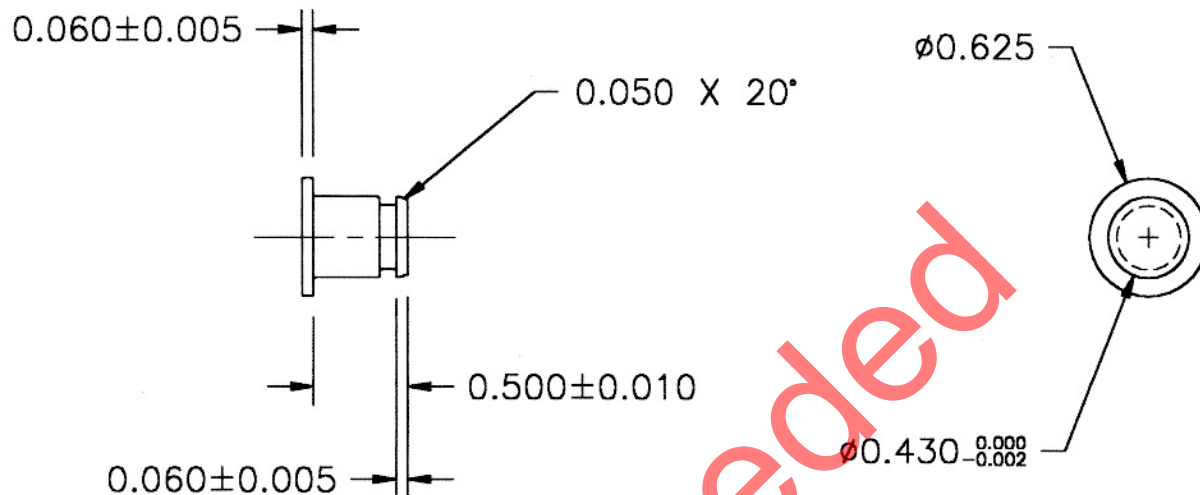
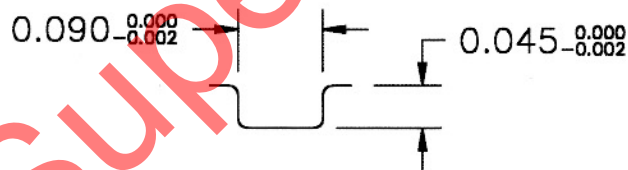


DART

DESIGN <i>[Signature]</i>	DRAWN BY <i>[Signature]</i>	DART AEROSPACE LTD VICTORIA INTERNATIONAL AIRPORT, CANADA	
CHECKED <i>BW</i>	APPROVED <i>[Signature]</i>	DRAWING NO. D2594	REV. B SHEET 1 OF 1
DATE 96:09:16		TITLE PLUG	SCALE 1:1
B	97:03:15	ADD GROOVE AND O-RING	
B1	RF 02.08.26	ADD Powder coat, QSE 018, & QQ-A SPECS.	

D2594-1 PLUG:GROOVE DETAIL (SCALE 5:1)TOLERANCES ARE PER ~~DART~~ QSE 018 UNLESS OTHERWISE NOTED.

BREAK ALL SHARP CORNERS 0.010 MAX

MATERIAL: 5052-H32 OR 6061-T6 OR 1100-O

FINISH: ACID ETCH, ALODINE

POWDER COAT WHITE (REF. 43.5.1) PER QSE 005 4.3

PER QQ-A-225/7 (5052)
OR QQ-A-225/8 (6061)
OR QQ-A-225/1 (1100)
OR QQ-A-200/8 (6061)

D2594-3 O-RING: 5/16 ID, 7/16 OD, 1/16 WIDTH
(PARKER 2-011)

D2594 PLUG ASSEMBLY INCLUDES: (1) D2594-1 PLUG
(1) D2594-3 O-RING